PROFESSIONAL MEASURING
SINCE 1844

KERN


Product brochure

30.10.2026

KERN 572-30

All-rounder, e.g. as precision balance in the laboratory or in harsh industrial applications, ideal for the diverse possibilities of Industry 4.0 applications

ENGLISH

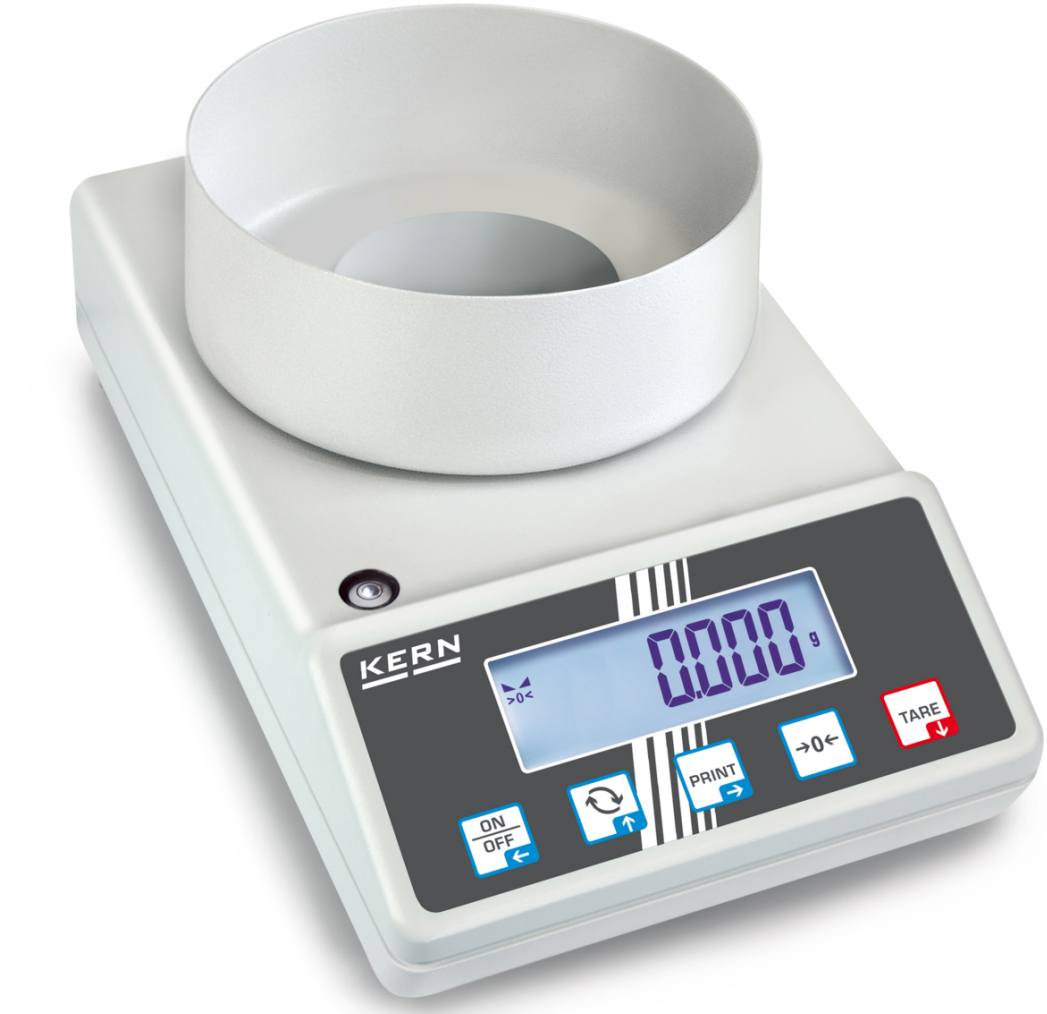

CONTACT

KERN & SOHN GmbH
Ziegelei 1
72336 Balingen
Germany

+49 7433 9933-0
info@kern-sohn.com
www.kern-sohn.com





ENGLISH

FEATURES

- Thanks to the many typical laboratory functions, such as, for example, recipe function, percentage determination, combined with the high level of precision, the KERN 572 is a reliable partner for day-to-day work in the laboratory
- The robust version, typical industrial functions, such as piece-counting, vibrationfree weighing and the large weighing ranges also make these balances ideal for all industrial applications, where a high level of precision is required
- KERN Universal Port (KUP): permits the connection of an external KUP interface adapter, such as, for example, RS-232, USB, Bluetooth, WiFi or Ethernet, for the exchange of data and control commands, without any installation outlay
- KERN Communication Protocol (KCP): The KCP permits searching and remote control of the balance using external control devices or computers
- Standardised, simplified concept of operation
- Freely programmable weighing unit, e.g. display direct in special units such as length of thread g/m, paper weight g/m^2, or similar
- The robust aluminium diecast housing maintains the stability, protects the weighing technology elements and is robust enough to cope with everyday use
- Ring-shaped draught shield standard, weighing space ⌀×H 157×43 mm
- Level indicator to level the balance precisely
- Load support on the underside of the balance for models, Loop for underfloor weighing included with the delivery
- Protective working cover included with delivery

TECHNICAL DATA

- Large backlit LCD display, digit height 21 mm
- Dimensions weighing surface, stainless steel, ⌀ 106 mm
- Overall dimensions 180×310×85 mm
- Net weight approx. 2,4 kg
- Permissible ambient temperature -10 °C/40 °C

MAIN SCOPE OF APPLICATIONS

- Laboratory applications
- Quality control
- Workshops
- Sample analysis
- Food industry

PICTOGRAMS

Standard



Option



Factory



MODEL OVERVIEW

Model	Weighing capacity [Max]	Readability [d]	Reproducibility	Linearity	Dimensions weighing surface
572-43	10 kg	0,0001 kg	0,0001 kg	± 0,0003 kg	160×200 mm
572-49	16 kg	0,0001 kg	0,0001 kg	± 0,0003 kg	160×200 mm
572-55	20 kg	0,00005 kg	0,0001 kg	± 0,00025 kg	160×200 mm
572-57	24 kg	0,0001 kg	0,0001 kg	± 0,0003 kg	160×200 mm
572-30	240 g	0,001 g	0,001 g	± 0,003 g	106 mm
572-31	300 g	0,001 g	0,002 g	± 0,005 g	106 mm
572-32	420 g	0,001 g	0,002 g	± 0,005 g	106 mm
572-33	1600 g	0,01 g	0,01 g	± 0,03 g	150 mm
572-35	2400 g	0,01 g	0,01 g	± 0,03 g	150 mm
572-37	3000 g	0,01 g	0,02 g	± 0,05 g	150 mm
572-39	4200 g	0,01 g	0,02 g	± 0,05 g	150 mm
572-45	12000 g	0,05 g	0,05 g	± 0,15 g	160×200 mm

ACCESSORIES

Model	Description
326-08	Test weight 326-08 (OIML Class F1, Nominal value 200 g, Eco Shape, stainless steel polished)

ENGLISH

Model	Description
572-A02	Protective working cover 572-A02
CFS-A03	Signal lamp KERN CFS-A03
KUP-01	RS-232 interface KUP-01
KUP-03	Interface USB-Device KUP-03
KUP-04	Ethernet interface KUP-04
KUP-05	WiFi interface KUP-05
KUP-06	Bluetooth BLE interface KUP-06
KUP-13	Extension box KUP-13
YKA-27	Power adapter YKA-27 (5,9V, 1A | 100 V - 240 V, 50 / 60 Hz | EURO, UK, US, CH)
YKC-01	Thermal printer YKC-01
YKG-01	Dot Matrix Printer YKG-01
YKH-01	Thermal printer YKH-01
YKR-01	Rechargeable battery pack YKR-01
YKT-01	Needle printer YKT-01
YPS-03	Antivibration table YPS-03
YPS-04	Anti-vibration plate KERN YPS-04 (400×450×60 mm, 30 kg)
YPS-05	Anti-vibration plate KERN YPS-05 (565×450×60 mm, 42 kg)

SOFTWARE

Model	Description
SCD-4.0-DL	Software SCD-4.0-DL (Scope of supplies: Download link for 1 license)
SCD-4.0-DLS05	Software SCD-4.0-DLS05 (Scope of supplies: Download link for 5 licenses)
SCD-4.0-PRO-DL	Software SCD-4.0-PRO-DL (Scope of supplies: Download link for 1 license)
SCD-4.0-PRO-DL-AS05	Software SCD-4.0-PRO-DL-AS05 (Scope of supplies: Download link for 5 licenses)
SET-01	Software KERN EasyTouch SET-01-2025a Base
SET-01	Software KERN EasyTouch SET-01 Base
SET-04	Software KERN EasyTouch SET-04-2025a Density
SET-04	Software KERN EasyTouch SET-04 Density
SET-05	Software KERN EasyTouch SET-05-2025a Dynamic
SET-05	Software KERN EasyTouch SET-05 Dynamic
SET-06	Software KERN EasyTouch SET-06-2025a Classification

Model	Description
SET-06	Software KERN EasyTouch SET-06 Classification
SET-07	Software KERN EasyTouch SET-07-2025a Variable
SET-07	Software KERN EasyTouch SET-07 Variable
SET-08	Software KERN EasyTouch SET-08-2025a Take-out
SET-08	Software KERN EasyTouch SET-08 Take-out
SET-10	Software KERN EasyTouch SET-10 Save Server
SET-11	Software KERN EasyTouch SET-11-2025a Safety
SET-11	Software KERN EasyTouch SET-11 Safety
SET-14	Software KERN EasyTouch SET-14-2025a Individual Print
SET-14	Software KERN EasyTouch SET-14 Individual Print
SET-16	Software KERN EasyTouch SET-16-2025a Batch and Statistics
SET-16	Software KERN EasyTouch SET-16 Batch and Statistics
SET-17	Software KERN EasyTouch SET-17-2025a PrePack
SET-17	Software KERN EasyTouch SET-17 PrePack
SET-18	Software KERN EasyTouch SET-18-2025a Container Master
SET-18	Software KERN EasyTouch SET-18 Container Master
SET-21	Software KERN EasyTouch SET-21-2025a Formulation
SET-21	Software KERN EasyTouch SET-21 Formulation
SET-22	Software KERN EasyTouch SET-22-2025a Difference
SET-22	Software KERN EasyTouch SET-22 Difference
SET-31	Software KERN EasyTouch SET-31-2025a Tolerance
SET-31	Software KERN EasyTouch SET-31 Tolerance
SET-32	Software KERN EasyTouch SET-32-2025a Count
SET-32	Software KERN EasyTouch SET-32 Count
SET-33	Software KERN EasyTouch SET-33-2025a Target Count
SET-33	Software KERN EasyTouch SET-33 Target Count
SET-35	Software KERN EasyTouch SET-35-2025a Assembly Count
SET-35	Software KERN EasyTouch SET-35 Assembly Count
SET-37	Software KERN EasyTouch SET-37-2025a Export Manager
SET-37	Software KERN EasyTouch SET-37 Export Manager
SET-39	Software KERN EasyTouch SET-39 Data Interface

Model	Description
SET-40	Software KERN EasyTouch SET-40 Protect
SET-46	Software KERN EasyTouch SET-46-2025a Backup Scheduler
SET-46	Software KERN EasyTouch SET-46 Backup Scheduler
SET-51	Software KERN EasyTouch SET-51-2025a Audit Logs
SET-51	Software KERN EasyTouch SET-51 Audit Logs
SET-52	Software KERN EasyTouch SET-52-2025a Inventory
SET-52	Software KERN EasyTouch SET-52 Inventory
SET-261	Software KERN EasyTouch SET-261 Audio Management
SET-311	Software KERN EasyTouch SET-311-2025a Quick Key
SET-311	Software KERN EasyTouch SET-311 Quick Key
SET-411	Software KERN EasyTouch SET-411-2025a Hotkeys
SET-411	Software KERN EasyTouch SET-411 Hotkeys

SERVICES

Model	Description
963-127	DAkkS calibration certificate 963-127
969-517	Confirmation of the manufacturer's specification (only in combination with DAkkS calibration certificate)969-517
970-103	Warranty extension (+2 years) 970-103

KERN Pictogram Overview

	External adjustment: Adjusting accuracy using external adjustment weight
	KERN IoT-Line balances – smart weighing solutions for the digital future
	KERN Universal Port (KUP): allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, USB, Bluetooth, WiFi, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort
	KERN Communication Protocol (KCP): a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems
	Piece counting: Reference quantities selectable. Display can be switched from piece to weight
	Sum function: The weight values of weighed items can be added together and the total printed out
	Percentage determination: determining the deviation in % from the target value (100 %)
	Units can be switched to e.g. non-metric units
	Measuring with tolerance range (checkweighing): Upper and lower limit values can be programmed, e.g. for sorting, portioning or for measuring coatings or material thicknesses. The process is supported by an acoustic and/or optical signal
	Hold function: When the weighing conditions are unstable, a stable weight is calculated as an average value
	Suspended weighing: Load support with hook on the underside of the balance
	Universal plug-in power supply: With universal input and optional input socket adapters for EU, CH, GB or EU, CH, GB, US or EU, CH, GB, US, AUS
	Weighing principle Strain gauges: Electrical resistor on an elastic deforming body
	Package shipment by courier service: The duration of internal product provision is one day
	EasyTouch: Suitable for the connection, data transmission and control through PC or tablet
	Data interface RS-232: For connection to printers, PCs or other peripheral devices for data transfer over longer distances. Network in bus topology possible
	Data Interface USB: For connection to printers, PCs or other peripheral devices
	Data interface Bluetooth: For connection to printers, PCs or other peripheral devices
	Data interface WiFi: For data transfer to printers, PCs or other peripheral devices
	Network interface: For connecting the measuring device to an Ethernet network
	Accredited calibration (DKD): The duration of the accredited calibration is 3 working days
	Rechargeable battery pack: Rechargeable set

ENGLISH