

Hyperpurex®

E

Eminent series

Laboratory water purification system

HyperPureX

Inside Equals Outside
Excellent Performance





Hyperpurex®

E Eminent series (EU/ED/EUS/EDS/EUE/EDE/ERS)

Intelligent Integration

Pure Water/Ultrapure Water System



Breakthrough design to highlight the aesthetics of science and technology.

E series, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, rigorous double RO system, and DI ion-exchange cartridges with larger capacity, equipping with 35-liter pure water tank, can meet your critical and professional application requirements of lab pure water.

System output ranges from 10 to 60 liters/h. It can simultaneously produce ultrapure water (18.2MΩ.cm), high pure water (>17.5MΩ.cm) or pure water[3]. The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ASTM D1193-06, GB/T 11446.1-2013, GB/T 33087-2016, GB/T 6682-2008, CP, EP, USP, JP, CAP, CLSI, etc.

[1] The double RO system is only used for EUS/EDS/ERS series products.
[2] EDI module is only used for EUE/EDE series products.
[3] ED/ERS series products can produce single RO water (ion rejection rate ⩾ 98%). EDS/ERS series products can produce double RO water (<5μs/cm).

Application Area:

- HPLC、UPLC、LC-MS
- ICP-MS、ICP-AES、AAS、GC-MS
- MALDI-TOF-MS、IC、TOC analysis
- Electrochemical, spectrophotometric determination
- Preparation of microbial media and reagents
- Cell culture, PCR, IVF
- Protein purification, electrophoresis, biochemistry
- Proteomics, genomics, immunoassay
- Feed water of laboratory instruments, such as: autoclave, bottle washing machine, environmental test chamber, water bath, etc.

Innovative Control System Bringing Efficiency & Intelligence

Intelligent human-computer interactive control system

- 5-inch IPS colorful capacitive touch screen, resolution: 800×480, free switching in dual language (Chinese-English) display, to achieve touch operation experience the same as mobile phone.
- All new style intuitive UI interface design, convenient to fully understand the system operating status and parameters. A glance for all important information.

Traceable comprehensive data management

- Store operating data records up to 3 years [1], including water dispensing, alarm and cartridge replacement, achieve data storage and paperless data management of the whole product life cycle by the cloud platform, meeting data tracking needs.
- With function of data exporting from USB port and data downloading from cloud platform.
- Data report documents in EXCEL format, meet traceability provisions of data integrity.
- Function of water dispensing report, including each water quality, water volume and user information, meet the regulatory requirements, easier to certificate.

[1] Storage duration varies depending on dispensing and alarm frequency.

Perfect consumables management

- Function of consumable life management (PP/PC/RO/DI/EDI/UP/UV/UF/TF[1]) combined with water quality, time and capacity, to reduce consumable costs.
- The remaining life of cartridges will display on the main interface with the form of dynamic icon. Function of cartridge life reminder, step by step with 3 kinds of color, blue (normal), yellow (warning), red (alarm), all cartridges status is clearly visible.
- Click the cartridge icon to learn remaining life of cartridges and view the cartridge status timely.
- Serial number verification function of original cartridges, encrypted long serial number verification code, to prevent misoperation of cartridges installation and replacement.

[1] According to different model, cartridges are different. For details, refer to the product manual.

Full security protection

- With DC24V as the main power supply, fully use weak current components, to meet the safety standards.
- 2 level permission management, administrator and ordinary users have strict permission distinction.
- With alarm protection of No feed water, low feed water pressure, system high pressure and full tank.
- With alarm function of standard-exceeding of Feed/RO/DI/UP water quality, and end of cartridge life.
- All alarm information can be stored in the host and cloud platform, to meet data security requirements.
- Timed shutdown and standby sleep function, to provide more protection for unattended operation.
- Optional external water leakage protection alarm device, to avoid the risk of water leakage and provide more safety protection.

Innovative Internet of Things (IOT) and cloud platform technology

- Access the internet by 4G or WIFI, achieve remote data acquisition, monitoring and management.
- Log into the cloud platform from PC, WAP or WeChat to get the device information.
- Timely alarm information to achieve fast customer service response.
- Health analysis based on big data makes fault judgment more accurate.
- Work order system can provide customers with efficient service guarantee.
- It can be connected to LIMS or BMS to realize equipment informatization and make laboratory information management more efficient and standardized.

Comprehensive water quality monitoring and alarm

- 3 water quality sensors, to monitor water quality and alarm (Feed water, RO water, DI water or UP water[1]), electrode constant-0.01cm-1, temperature sensitivity-0.1 °C , and the conductivity/resistivity after temperature compensation and water temperature can be displayed simultaneously.
- 2 flow sensors, to achieve (RO water, DI water or UP water [2]) quantitative dispensing function.
- With real-time display function of ion rejection rate of RO membrane.
- Optional feed water pressure sensor, to monitor and display feed pressure real-timely.
- Optional pure water tank liquid level sensor with dynamic icon on the main interface, can display the tank liquid level, storage capacity (L) and storage percentage (%) in real time. A glance for storage status.
- Optional independent TOC detection module, to monitor TOC of ultrapure water real-timely, detection range: 0.5-999.9ppb, detection accuracy: ±0.1ppb, in line with USP and EP system adaptability test.

[1] According to different model, grade and type of pure water are different. For details, refer to the product manual.
[2] According to different model, pure water type of quantitative dispensing is different. For details, refer to the product manual.

Flexible and diverse water dispensing mode[1]

- The host is equipped with RO, DI or UP[1] 2 standard pure water outlet. 2 kinds of water dispensing - general and quantitative spreading in parallel, to make dispensing more convenient.
- Pressure water tank, which can isolate air, stores RO water to cope with large water dispensing needs.[2]
- Professional PE pure water tank, to provide the third pure water outlet, to improve water dispensing efficiency.
- Up to 5 water dispenser arms per host is optional, with general, quantitative and instant - 3 kinds of water dispensing mode. More flexible to dispense.

[1] According to different model, pure water kind and dispensing mode are different. For details, refer to the product manual.
[2] Only applicable to EDE system

Professional ultrapure water circulation and disinfection function[1]

- Ultrapure water circulation system with adjustable interval running times, to keep the system in low levels of bacterial contamination and reduce energy consumption.
- Ultrapure water pipeline disinfection function with chemical dosing can display the remaining time of disinfection. Simply install Hyperpurex unique disinfection module to effectively sterilize the entire ultrapure water pipeline.

[1] Applicable to ultrapure water systems.

Combination of Technology & Aesthetics Creating highlights both inside and out



Innovative design of cartridge structure

- Patented 3-chamber design, compatible with packaging of PP/PC/RO/DI cartridge, to ensure consistency.
- Patented clamping mechanism, easier and more efficient to install and replace the cartridge.
- Patented error-proofing design, effective to avoid installation errors of different cartridges.
- 12-inch cylinder with 1.36L resin filling capacity brings more bigger ion exchange capacity and more effective filtration.
- Encrypted long serial number verification code can identify the authenticity of cartridges, record the use and replacement of cartridges, and ensure the safety of the system.



All injection molded housing

- New and advanced manufacturing process bring compelling customer experience.
- With geometric surfaces and simple lines, to show rich three-dimensional sense. With extraordinary imagination, to highlight the aesthetics of science and technology. Beautiful & Easy to use.




Professional PE pure water tank

- Material: HDPE, double layer design. Anti-UV inhibitor is added to the outer layer to prevent the growth of algae inside and improve the durability of the tank. Pure PE raw material is used in inner layer to reduce material precipitation and ensure water quality safety.
- Drainage valve is installed at the cone bottom, which can empty the water tank and ensure thorough cleaning.
- Feeding from the bottom can reduce CO_2 absorption.
- The enlarged cover with seal can prevent air from entering and facilitate manual cleaning.
- Compound air filter is in the standard configuration, containing special packing and microporous membrane, to absorb CO_2 and organics, and filtrate bacteria and particles.
- UV disinfection module is optional to sterilize tank and inhibit the growth of bacteria in the tank.
- Equipped with an independent pressure sensor, independent level control module and LCD display, it can display the liquid level, storage (L) and storage percentage (%) of the water tank in real-time in the form of dynamic icons. A clear glance for storage status.

Powerful HiDis water dispenser arm (Optional)

- 1.54 inch Color display, to monitor dispensing resistivity, TOC,water temperature, flow rate, single and cumulative water quantity.
- General, quantitative, instant - 3 water dispensing modes cycle, meeting with needs of different water dispensing mode.
- It can be fixed on the bracket in any direction of 360 degrees horizontally, making dispensing water more flexible in different directions.
- Function of circulating with the host can always ensure the quality of pure water.
- Equipped with 0.2μm MF terminal microfilter or UF terminal ultrafilter, to produce bacterial-free, nuclease-free, proteinase-free ultrapure water.
- Up to 5 sets of HiDis water dispenser arm can be connected to one host, fully covering the pure water usage range on the laboratory table.





Advanced System Configuration Guaranteeing Strong Quality



1 Powerful 12-inch pretreated cartridge

- PP cartridge with deep folding membrane, accuracy of 5μm, to filter particles efficiently in source water.
- PC cartridge with high performance activated carbon fiber with catalyst, accuracy of 5μm, to adsorb organics and residual chlorine efficiently and avoid carbon powder precipitation maximumly.
- The combination of folding filter & carbon fiber filter can bring greater cartridge processing capacity, extend the replacement cycle and reduce the running cost.





2 Rigorous double RO system[1]

- Double RO system can remove up to 99% soluble inorganic ions, 99% soluble organics, microorganisms and particles.
- Compared with single RO system, the double RO water quality can be stable < 5μs/cm (feed water conductivity < 1500μs/cm), and the life of the ultrapure unit is longer.
- Equipped with DuPont RO membrane, to achieve combination of long life, stability and high ion rejection rate.
- Auto-flushing function of RO module with adjustable flushing interval and duration, to effectively prevent scale and prolong the life of the membrane.
- The automatic discharge function of unqualified RO water can ensure that the RO water quality is suitable to enter the back-end module.
- Integral package of discarded RO module, easy to install and maintain.

[1] Applicable to EUS/EDS/ERS.



3 High performance purification cartridge

- Patented cartridge structure uses full droop flow mode to prevent the stratification of resin and ensure the exchange capacity of cartridge.
- The resin filling capacity per cartridge is up to 1.36 liters, and up to 3 cartridges can be equipped every host[1], with a total filling capacity of 4.08 liters, achieving greater ion exchange capacity and significantly reducing the running cost.
- All DuPont resin and high purity material of column ensure absolute 18.2MΩ.cm of ultrapure water resistivity and reduce TOC precipitation.

[1] According to different model, cartridge configuration is different. For details, refer to the product manual.



4 Professional mini EDI module[1]

- Without softener and chemical regeneration, pure water in grade II , with resistivity > 10MΩ.cm@25 ℃ (generally above 15MΩ.cm), and TOC<30ppb[2], is available. It can prolong the life of back-end module and reduce the running cost.


[1] Applicable to EUE/EDE.
[2] The values vary depending on the nature and concentration of contaminants in source water.




5 Built-in 1.8-liter pressure water tank[1]

- With dual functions of water storage and pressurization, FDA approved, its fully enclosed structure effectively isolates air, and prevent the touching of CO_2 and other pollutants with pure water. Up to 100 liters is optional volume.
- 60 or 120 liters pure water tank with liquid level sensor, equipped with air filter, is optional to achieve more professional pure water storage.

[1] Only applicabe to EDE system

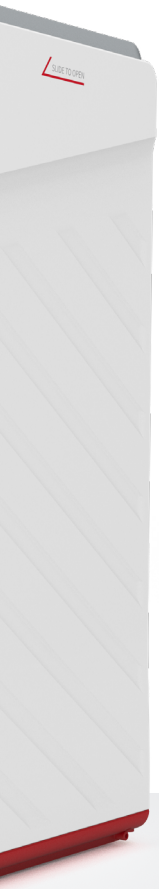


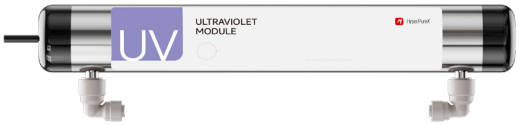

6 Double wavelength UV module[1]

- Long-life ultraviolet lamp (185&254nm), combined with SUS316L flow shell, can reduce the value of TOC to ⩽2ppb[2], and can achieve efficient sterilization and inhibit bacterial growth, suitable for HPLC, UPLC, LC-MS and other precision instruments.

[1] Applicable to ultrapure water systems equipped with UV module.
[2] The values vary depending on the nature and concentration of contaminants in source water.

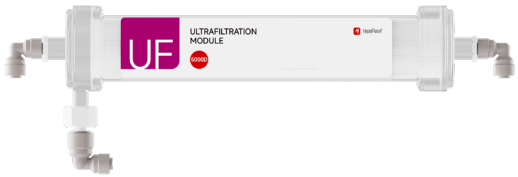

7 Ultrafiltration module[1]

- With PES membrane and MWCO>5000D, effectively removes pyrogen/endotoxin, RNase, DNase, and produces nuclease-free, proteinase-free and bacterial-free ultrapure water, suitable for life science applications, such as cell culture/IVF.

[1] Applicable to ultrapure water systems equipped with UF module.



8 MF terminal microfilter[1]

- (0.45+0.2)μm double-layer PES membrane ensures microbial retention, effectively removes particles and bacteria, and meets critical application requirements.

[1] Applicable to ultrapure or high-pure water system. For details, refer to the product manual.



10 Multiple communication interfaces[1]

- USB interface, to export running data or upgrade system version online.
- RJ45 or USB/WIFI interface, to achieve the IOT and cloud platform connection.
- HiDis pure water dispensing arm interface, to achieve power supply and data communication with the host.(Optional)
- L-Tank pure water tank interface, to synchronize water tank level signal with the host. (Optional)
- FS foot switch interface, easy to dispense, suitable for more dispensing scenarios. (Optional)

[1] The interface configuration varies according to the model. For details, refer to the product manual.



9 UF terminal ultrafilter[1]

- With PES membrane and MWCO>15000D, effectively removes pyrogen/endotoxin, RNase, DNase, and produces nuclease-free, proteinase-free and bacterial-free ultrapure water, suitable for life science applications, such as cell culture/IVF.

[1] Optional accessory for ultrapure water system only.

EU Eminent series

Intelligent Integration Ultrapure Water System


—Ultrapure water, high pure water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, stable and reliable single RO system, and Dl ion-exchange cartridges with larger capacity, equipping with 35-liter pure water tank.

System output: 20, 40, 60 liters/h. It can simultaneously produce ultrapure water (18.2MΩ.cm) and high pure water (>16MΩ.cm). The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ASTM D1193-06, GB/T 11446.1-2013, GB/T 33087-2016, GB/T 6682-2008, CP, EP, USP, JP, CAP, CLSI, etc.



Flow Diagram

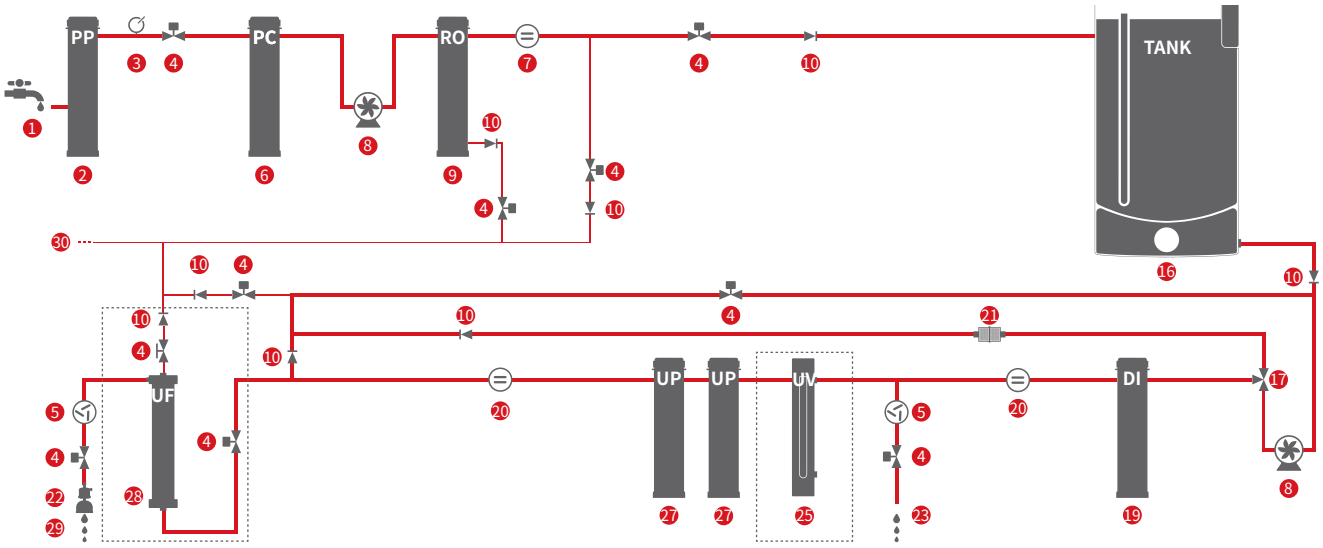

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

EU Specifications

Name	Standard	Low TOC	Eliminating endotoxin	Synthesizing
Model	**EU-20/40/60**	**EU-20/40/60UV**	**EU-20/40/60UF**	**EU-20/40/60UVF**
Production rate [1]	20 series: 20 L/hour, 40 series: 40 L/hour, 60 series: 60 L/hour			
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute	Up to 2 liters/minute	Up to 2 liters/minute
Ultrapure water quality [3]				
Resistivity (25°C) [4]	18.2 MΩ.cm	18.2 MΩ.cm	18.2 MΩ.cm	18.2 MΩ.cm
Conductivity (25°C)	0.055 μs/cm	0.055 μs/cm	0.055 μs/cm	0.055 μs/cm
TOC [5]	5 ppb[6]	2 ppb[7]	5 ppb[6]	2 ppb[7]
Particles [8]	<1 /ml (>0.2μm)	<1 /ml (>0.2μm)	<1 /ml (>0.2μm)	<1 /ml (>0.2μm)
Bacteria [9]	<0.01 CFU/ml	<0.01 CFU/ml	<0.01 CFU/ml	<0.01 CFU/ml
Endotoxin [10]	N/A	N/A	<0.001EUml	<0.001EU/ml
RNases [10]	N/A	N/A	1 pg/ml	1 pg/ml
DNases [10]	N/A	N/A	5 pg/ml	5 pg/ml
Protease [10]	N/A	N/A	0.15 μg/ml	0.15 μg/ml
DI water quality [3]				
Resistivity (25°C) [4]	>16 MΩ.cm	>16 MΩ.cm	>16 MΩ.cm	>16 MΩ.cm
Conductivity (25°C)	<0.063 μs/cm	<0.063 μs/cm	<0.063 μs/cm	<0.063 μs/cm
Particles [8]	N/A	N/A	N/A	N/A
Bacteria [9]	N/A	N/A	N/A	N/A
RO^{1st} water quality [3]				
Ion rejection rate	98%-99% (with new RO module)	98%-99% (with new RO module)	98%-99% (with new RO module)	98%-99% (with new RO module)
Organic rejection rate	>99% (MW>300 Dalton)	>99% (MW>300 Dalton)	>99% (MW>300 Dalton)	>99% (MW>300 Dalton)
Particles and bacteria rejection rate	>99%	>99%	>99%	>99%
Feed water requirements				
Water source type	Tap water	Tap water	Tap water	Tap water
Pressure	1-6 bar	1-6 bar	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm	<3 ppm	<3 ppm
PH	4-10	4-10	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm	<30 ppm	<30 ppm
Power supply	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz
Total Power	20 series: 120W 40 /60 series: 240W	240W	20 series: 120W 40 /60 series: 240W	240W
Dimension (L×W×H)	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35LPE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm
Weight	Main host: about 28KG 35L PE Tank: 12KG	Main host: about 28KG 35L PE Tank: 12KG	Main host: about 28KG 35L PE Tank: 12KG	Main host: about 28KG 35L PE Tank: 12KG
Standard configuration	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

ED Eminent series

Intelligent Integration Pure Water System


—High pure water, RO[1st] water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, stable and reliable single RO system, and Dl ion-exchange cartridges with larger capacity, equipping with 35-liter pure water tank.

System output: 20, 40, 60 liters/h. It can simultaneously produce high pure water (>17.5MΩ.cm) and single RO water. The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ISO3696 (Grade 2), GB/T 6682 (Grade 1), ASTM D1193 (Type II reagent water), JIS K0557, etc., also meets the purified water technical requirements of CP, EP, USP, JP and other national pharmacopoeia.



Flow Diagram

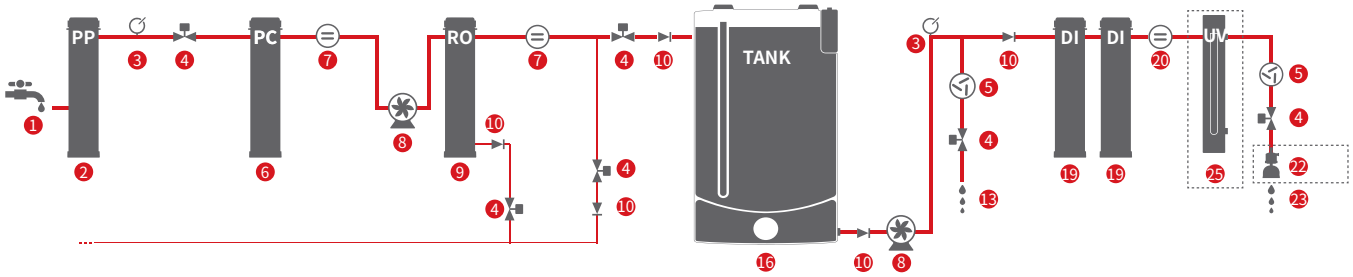

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

ED Specifications

Name	Standard	Eliminating bacteria and particle
Model	**ED-20/40/60**	**ED-20/40/60UT**
Production rate [1]	20 series: 20 L/hour, 40 series: 40 L/hour, 60 series: 60 L/hour	
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute
DI water quality[3]		
Resistivity（25°C ）[4]	>17.5 MΩ.cm	>17.5 MΩ.cm
Conductivity（25°C）	<0.057 μs/cm	<0.057 μs/cm
Particles [8]	N/A	<1 /ml （>0.2μm）
Bacteria [9]	N/A	<0.01 CFU/ml
RO^{1st} water quality [3]		
Ion rejection rate	98%-99% (with new RO module)	98%-99% (with new RO module)
Organic rejection rate	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）
Particles and bacteria rejection rate	>99%	>99%
Feed water requirements		
Water source type	Tap water	Tap water
Pressure	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm
PH	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm
Power supply	100-240V，50/60Hz	100-240V，50/60Hz
Total Power	20 series: 120W 40 /60 series: 240W	240W
Dimension (L×W×H)	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm
Weight	Main host: about 26KG 35L PE Tank: 12KG	Main host: about 26KG 35L PE Tank: 12KG
Standard configuration	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

EUS Eminent series

Intelligent Integration Ultrapure Water System


—Ultrapure water, high pure water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, rigorous double RO system, and DI ion-exchange cartridges with larger capacity, equipping with 35-liter pure water tank.

System output: 13, 25 liters/h. It can simultaneously produce ultrapure water (18.2MΩ.cm) and high pure water (>16MΩ.cm). The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ASTM D1193-06, GB/T 11446.1-2013, GB/T 33087-2016, GB/T 6682-2008, CP, EP, USP, JP, CAP, CLSI, etc.



Flow Diagram

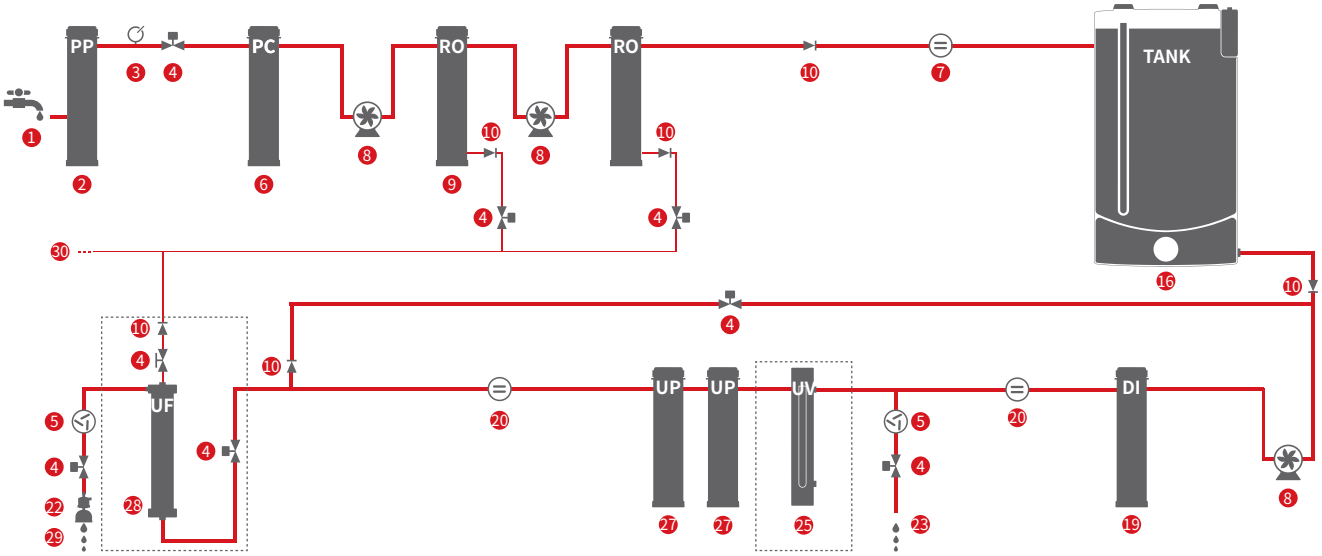

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

EUS Specifications

Name	Standard	Low TOC	Eliminating endotoxin	Synthesizing
Model	**EUS-13/25**	**EUS-13/25UV**	**EUS-13/25UF**	**EUS-13/25UVF**
Production rate [1]	13 series: 13 L/hour, 25 series: 25 L/hour			
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute	Up to 2 liters/minute	Up to 2 liters/minute
Ultrapure water quality [3]				
Resistivity（25°C）[4]	18.2 MΩ.cm	18.2 MΩ.cm	18.2 MΩ.cm	18.2 MΩ.cm
Conductivity（25°C）	0.055 μs/cm	0.055 μs/cm	0.055 μs/cm	0.055 μs/cm
TOC [5]	5 ppb[6]	2 ppb[7]	5 ppb[6]	2 ppb[7]
Particles [8]	<1 /ml （>0.2μm）	<1 /ml （>0.2μm）	<1 /ml （>0.2μm）	<1 /ml （>0.2μm）
Bacteria [9]	<0.01 CFU/ml	<0.01 CFU/ml	<0.01 CFU/ml	<0.01 CFU/ml
Endotoxin [10]	N/A	N/A	<0.001 EU/ml	<0.001 EU/ml
RNases [10]	N/A	N/A	1 pg/ml	1 pg/ml
DNases [10]	N/A	N/A	5 pg/ml	5 pg/ml
Protease [10]	N/A	N/A	0.15 μg/ml	0.15 μg/ml
DI water quality [3]				
Resistivity（25°C）[4]	>16 MΩ.cm	>16 MΩ.cm	>16 MΩ.cm	>16 MΩ.cm
Conductivity（25°C）	<0.063 μs/cm	<0.063 μs/cm	<0.063 μs/cm	<0.063 μs/cm
Particles [8]	N/A	N/A	N/A	N/A
Bacteria [9]	N/A	N/A	N/A	N/A
RO^{2nd} water quality [3]				
Resistivity（25°C）[4]	>0.2 MΩ.cm	>0.2 MΩ.cm	>0.2 MΩ.cm	>0.2 MΩ.cm
Conductivity（25°C）	<5 μs/cm	<5 μs/cm	<5 μs/cm	<5 μs/cm
Organic rejection rate	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）
Particles and bacteria rejection rate	>99%	>99%	>99%	>99%
Feed water requirements				
Water source type	Tap water	Tap water	Tap water	Tap water
Pressure	1-6 bar	1-6 bar	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm	<3 ppm	<3 ppm
PH	4-10	4-10	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm	<30 ppm	<30 ppm
Power supply	100-240V，50/60Hz	100-240V，50/60Hz	100-240V，50/60Hz	100-240V，50/60Hz
Total Power	240W	240W	240W	240W
Dimension (L×W×H)	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm
Weight	Main host: about 32KG 35L PE Tank: 12KG	Main host: about 32KG 35L PE Tank: 12KG	Main host: about 32KG 35L PE Tank: 12KG	Main host: about 32KG 35L PE Tank: 12KG
Standard configuration	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

EDS Eminent series

Intelligent Integration Pure Water System


—High pure water, RO^{2nd} water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, rigorous double RO system, equipping with 35-liter pure water tank.

System output: 13, 25 liters/h. It can simultaneously produce high pure water (>17.5MΩ.cm) and double RO water (<5μs/cm). The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ISO3696 (Grade 2), GB/T 6682 (Grade 1), ASTM D1193 (Type II reagent water), JIS K0557, etc., also meets the purified water technical requirements of CP, EP, USP, JP and other national pharmacopoeia.



Flow Diagram

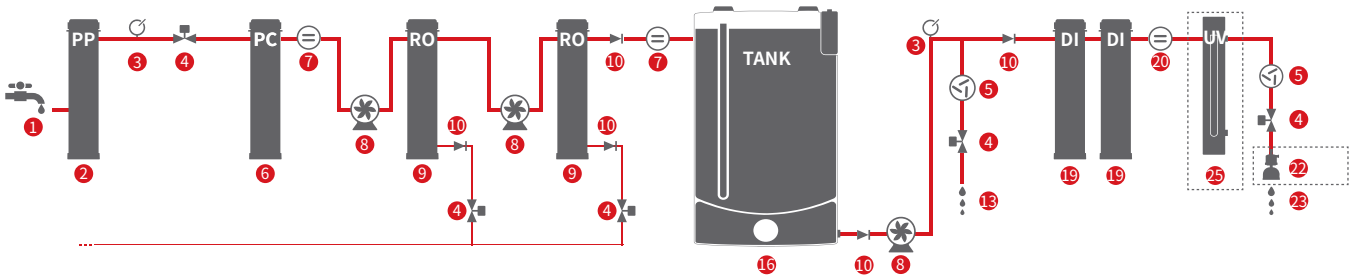

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

EDS Specifications

Name	Standard	Eliminating bacteria and particle
Model	**EDS-13/25**	**EDS-13/25UT**
Production rate [1]	13 series: 13 L/hour, 25 series: 25 L/hour	
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute
DI water quality [3]		
Resistivity（25°C) [4]	>17.5 MΩ.cm	>17.5 MΩ.cm
Conductivity（25°C）	<0.057 μs/cm	<0.057 μs/cm
Particles [8]	N/A	<1 /ml （>0.2μm）
Bacteria [9]	N/A	<0.01 CFU/ml
RO^{2nd} water quality [3]		
Resistivity（25°C) [4]	>0.2 MΩ.cm	>0.2 MΩ.cm
Conductivity（25°C）	<5 μs/cm	<5 μs/cm
Organic rejection rate	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）
Particles and bacteria rejection rate	>99%	>99%
Feed water requirements		
Water source type	Tap water	Tap water
Pressure	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm
PH	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm
Power supply	100-240V，50/60Hz	100-240V，50/60Hz
Total Power	240W	240W
Dimension (L×W×H)	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm	Main host: 370×623×600mm 35L PE Tank: 392×518×630mm
Weight	Main host: about 30KG 35L PE Tank: 12KG	Main host: about 30KG 35L PE Tank: 12KG
Standard configuration	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

EUE Eminent series

Intelligent Integration Ultrapure Water System


—Ultrapure water, EDI water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, stable and reliable single RO system,advanced EDI module and DI ion-exchange cartridges with larger capacity, equipping with professional-grade pure water tank with 60-liter.

System output: 10, 20 liters/h. Maximum output per day is up to 480 liters. It can simultaneously produce ultrapure water (18.2MΩ.cm) and EDI water (Resistivity>10MΩ.cm, TOC<30ppb) with optimized running cost. The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ASTM D1193-06, GB/T 11446.1-2013, GB/T 33087-2016, GB/T 6682-2008, CP, EP, USP, JP, CAP, CLSI, etc.



Flow Diagram

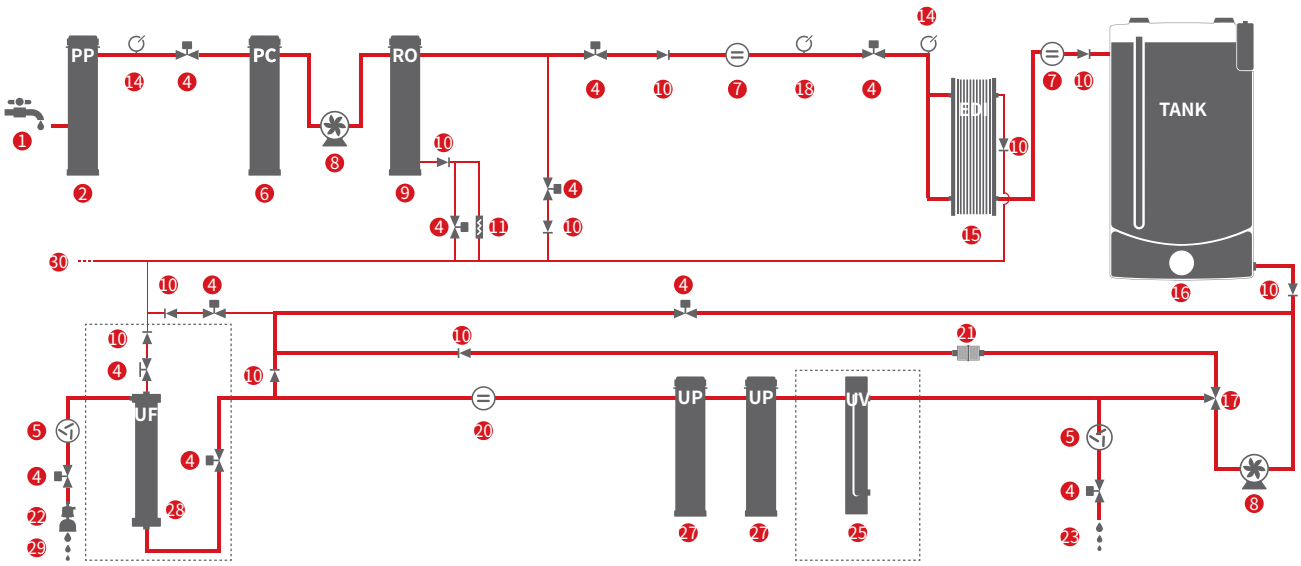

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

EUE Specifications

Name	Standard	Low TOC	Eliminating endotoxin	Synthesizing
Model	**EUE-10/20**	**EUE-10/20UV**	**EUE-10/20UF**	**EUE-10/20UVF**
Production rate [1]	10 series: 10 L/hour, 20 series: 20 L/hour			
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute	Up to 2 liters/minute	Up to 2 liters/minute
Ultrapure water quality [3]				
Resistivity（25°C）[4]	18.2 MΩ.cm	18.2 MΩ.cm	18.2 MΩ.cm	18.2 MΩ.cm
Conductivity（25°C）	0.055 μs/cm	0.055 μs/cm	0.055 μs/cm	0.055 μs/cm
TOC [5]	5 ppb[6]	2 ppb[7]	5 ppb[6]	2 ppb[7]
Particles [8]	<1 /ml （>0.2μm）	<1 /ml （>0.2μm）	<1 /ml （>0.2μm）	<1 /ml （>0.2μm）
Bacteria [9]	<0.01 CFU/ml	<0.01 CFU/ml	<0.01 CFU/ml	<0.01 CFU/ml
Endotoxin [10]	N/A	N/A	<0.001 EU/ml	<0.001 EU/ml
RNases [10]	N/A	N/A	1 pg/ml	1 pg/ml
DNases [10]	N/A	N/A	5 pg/ml	5 pg/ml
Protease [10]	N/A	N/A	0.15 μg/ml	0.15 μg/ml
EDI water quality [3]				
Resistivity（25°C）[4]	>10 MΩ.cm	>10 MΩ.cm	>10 MΩ.cm	>10 MΩ.cm
Conductivity（25°C）	<0.1 μs/cm	<0.1 μs/cm	<0.1 μs/cm	<0.1 μs/cm
TOC [5]	⩽ 30 ppb	⩽ 30 ppb	⩽ 30 ppb	⩽ 30 ppb
Particles [8]	N/A	N/A	N/A	N/A
Bacteria [9]	N/A	N/A	N/A	N/A
RO^{2nd} water quality [3]				
Ion rejection rate	98%-99% (with new RO module)	98%-99% (with new RO module)	98%-99% (with new RO module)	98%-99% (with new RO module)
Organic rejection rate	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）
Particles and bacteria rejection rate	>99%	>99%	>99%	>99%
Feed water requirements				
Water source type	Tap water	Tap water	Tap water	Tap water
Pressure	1-6 bar	1-6 bar	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm	<3 ppm	<3 ppm
PH	4-10	4-10	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm	<30 ppm	<30 ppm
Power supply	100-240V，50/60Hz	100-240V，50/60Hz	100-240V，50/60Hz	100-240V，50/60Hz
Total Power	240W	240W	240W	240W
Dimension (L×W×H)	Main host: 370×623×600mm Tank: 392×518×772mm	Main host: 370×623×600mm Tank: 392×518×772mm	Main host: 370×623×600mm Tank: 392×518×772mm	Main host: 370×623×600mm Tank: 392×518×772mm
Weight	Main host: about 29G Tank: about 16KG	Main host: about 29G Tank: about 16KG	Main host: about 29G Tank: about 16KG	Main host: about 29G Tank: about 16KG
Standard configuration	Main host 1 set All cartridges 1 set 60-liter water tank 1 set	Main host 1 set All cartridges 1 set 60-liter water tank 1 set	Main host 1 set All cartridges 1 set 60-liter water tank 1 set	Main host 1 set All cartridges 1 set 60-liter water tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

EDE Eminent series

Intelligent Integration Pure Water System


—EDI water, ,RO[1st] water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure, stable and reliable single RO system, and advanced EDI module, equipping with built-in 1.8-liter pressure water tank and professional-grade pure water tank with 60-liter.

System output: 10, 20 liters/h. Maximum output per day is up to 480 liters. It can simultaneously produce single RO water (<5μs/cm) and EDI water (Resistivity>10MΩ.cm, TOC<30ppb) with optimized running cost. The quality of pure water fully meets or exceeds the requirements of water quality standard specified by ISO3696 (Grade 2), GB/T 6682 (Grade 1), ASTM D1193 (Type II reagent water), JIS K0557, etc., also meets the purified water technical requirements of CP, EP, USP, JP and other national pharmacopoeia.



Flow Diagram

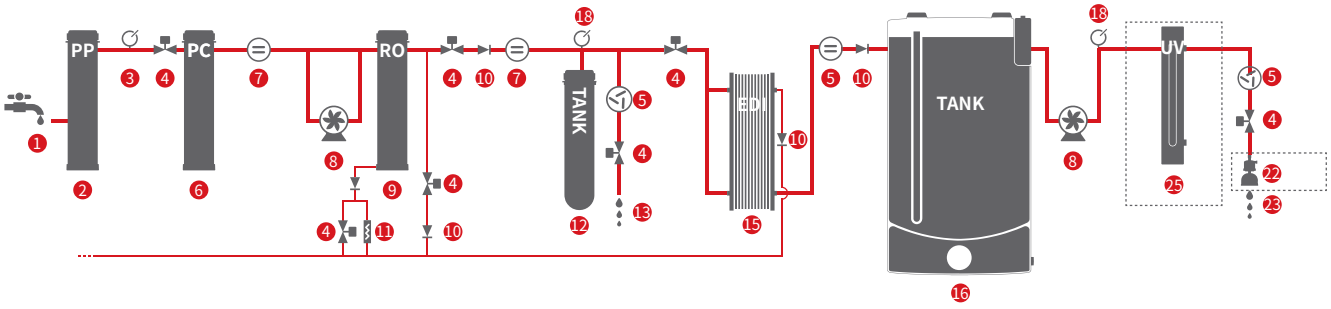

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

EDE Specifications

Name	Standard	Eliminating bacteria and particle
Model	**EDE-10/20**	**EDE-10/20UT**
Production rate [1]	10 series: 10 L/hour, 20 series: 20 L/hour	
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute
EDI water quality [3]		
Resistivity（25°C) [4]	>10 MΩ.cm	>10 MΩ.cm
Conductivity（25°C）	<0.1 μs/cm	<0.1 μs/cm
TOC [5]	⩽ 30 ppb	⩽ 30 ppb
Particles [8]	N/A	<1 /ml （>0.2μm）
Bacteria [9]	N/A	<0.01 CFU/ml
RO[1st] water quality [3]		
Ion rejection rate	98%-99% (with new RO module)	98%-99% (with new RO module)
Organic rejection rate	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）
Particles and bacteria rejection rate	>99%	>99%
Feed water requirements		
Water source type	Tap water	Tap water
Pressure	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm
PH	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm
Power supply	100-240V，50/60Hz	100-240V，50/60Hz
Total Power	240W	240W
Dimension (L×W×H)	Main host: 370×623×600mm Tank: 392×518×772mm	Main host: 370×623×600mm Tank: 392×518×772mm
Weight	Main host: about 27G Tank: about 16KG	Main host: about 27G Tank: about 16KG
Standard configuration	Main host 1 set All cartridges 1 set 60-liter water tank 1 set	Main host 1 set All cartridges 1 set 60-liter water tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

ERS Eminent series

Intelligent Integration Double RO Water System


—RO[2nd] water, RO[1st] water

With tap water inlet, using the innovative human-computer interactive control system and 5-inch IPS colorful capacitive touch screen, integrating functions of Internet of Things (IOT) and cloud platform, embedding new purification cartridges with patented structure and rigorous double RO system, equipping with 35-liter pure water tank, can meet your critical and professional application requirements of lab pure water.

System output: 13, 25 liters/h. It can simultaneously produce single RO and double RO water. The ion rejection rate of single RO water is above of 98%, and the conductivity of double RO water is less than 5μs/cm. The quality of pure water fully meets or exceeds the requirements of water quality standard specified by GB/T 6682-2008 (Grade 3).



Flow Diagram

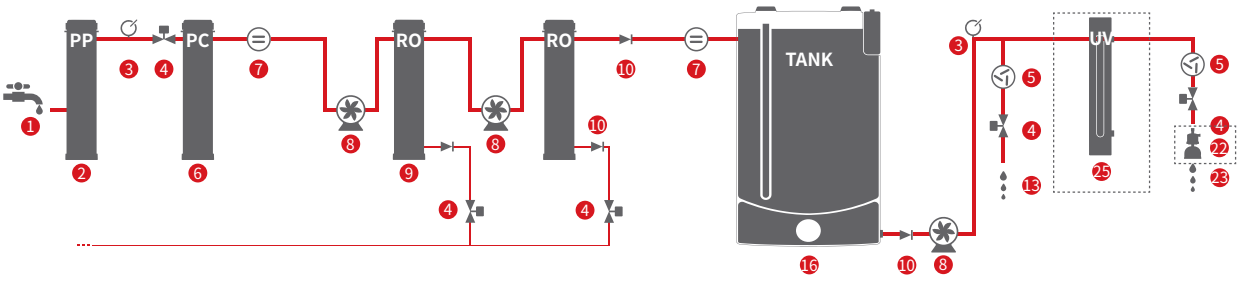

1. Feed Water
2. PP Pretreatment Cartridge
3. Pressure sensor
4. Solenoid valve
5. Flow sensor
6. PC Pretreatment Cartridge
7. Conductivity Sensor
8. Pump
9. RO cartridge
10. One way valve
11. Flow Restrictor
12. Pressure water tank
13. RO Water Outlet
14. Low tension switch
15. EDI Component
16. PE water tank
17. Three way valve
18. High tension switch
19. DI Cartridge
20. Resistivity Sensor
21. Sanitization Block
22. Final Filter
23. DI Water Outlet
24. Dispenser arm
25. UV Component
26. TOC Component
27. UP Ultrapure cartridge
28. UF Cartridge
29. UP Water Outlet
30. Drain Outlet

ERS Specifications

Name	Standard	Eliminating bacteria and particle
Model	**ERS-13/25**	**ERS-13/25UT**
Production rate [1]	13 series: 13 L/hour, 25 series: 25 L/hour	
Dispensing rate [2]	Up to 2 liters/minute	Up to 2 liters/minute
RO^{1st} water quality [3]		
Ion rejection rate	>98% (with new RO module)	>98% (with new RO module)
RO^{2nd} water quality [3]		
Resistivity（25°C ） [4]	>0.2 MΩ.cm	>0.2 MΩ.cm
Conductivity（25°C）	<5 μs/cm	<5 μs/cm
Organic rejection rate	>99%（MW>300 Dalton）	>99%（MW>300 Dalton）
Particles and bacteria rejection rate	>99%	>99%
Particles [8]	N/A	<1 /ml （>0.2μm）
Bacteria [9]	N/A	<0.01 CFU/ml
Feed water requirements		
Water source type	Tap water	Tap water
Pressure	1-6 bar	1-6 bar
Temperature	5-40 °C	5-40 °C
Conductivity	<2000 μs/cm	<2000 μs/cm
Total hardness (In $CaCO_3$)	<300 ppm	<300 ppm
TOC	<2000 ppb	<2000 ppb
Free chlorine	<3 ppm	<3 ppm
PH	4-10	4-10
Dissolved CO_2	<30 ppm	<30 ppm
Power supply	100-240V，50/60Hz	100-240V，50/60Hz
Total Power	240W	240W
Dimension (L×W×H)	Host:370×623×600mm 35L PE Tank: 392×518×630mm	Host:370×623×600mm 35L PE Tank: 392×518×630mm
Weight	Main host: about 27KG 35L PE Tank: 12KG	Main host: about 27KG 35L PE Tank: 12KG
Standard configuration	Main host 1 set All cartridges 1 set 35L PE Tank 1 set	Main host 1 set All cartridges 1 set 35L PE Tank 1 set

[1] Affected by inlet water quality, pressure, temperature and status of RO membrane
[2] Affected by the tank status and terminal filter
[3] The following values are typical and may vary depending on the nature and concentration of feed water contaminants
[4] According to USP requirements, the resistivity can be displayed as a non-temperature-compensated value
[5] Affected by the type of organics
[6] Inlet TOC<1000ppb, follow professional operating procedures and correct sampling conditions
[7] Inlet TOC<50ppb, follow professional operating procedures and correct sampling conditions
[8] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[9] Equip with terminal microfilter and follow professional operating procedures and correct sampling conditions
[10] Equip with terminal ultrafilter and follow professional operating procedures and correct sampling conditions

Hyperpurex® lab water system

Bring you products and services beyond expected



PRODUCT

- Under management system of ISO9001 and ISO14001, in accordance with CE quality standards, we carry out product design, research & development and manufacturing to ensure long-term stability and reliability of quality.
- To help you meet industry specifications, we can assist in providing certificates of conformity, calibration certificates, quality certificates, performance reports, water quality compliance certificates and other supporting documents upon request.
- Hyperpurex® E Eminent series - lab water system can produce pure water/ultrapure water to meet the requirements of the following organizations:
- Chinese Pharmacopoeia-CP, United States Pharmacopoeia-USP, European Pharmacopoeia-EP, Japanese Pharmacopoeia -JP, GB/T 33087-2016,GB/T 6682-2008,GB/T 11446.1-2013,ASTM D1193,ASTM D 5196,ISO 3696,CLSI,JIS K 0557.

SERVICE

We wholeheartedly serve, only for your full satisfaction.

With customer satisfaction as the service goal, to continue to create value for customers as the direction, to grow together with customers as the concept, based on professionalism, we are full of sincerity and enthusiasm, committing to providing customers with professional and perfect technical support and after-sales service. So that you can devote all your energy to focus on the work.

Our service include:

- 24 months product warranty (excluding filter consumables)
- On-site professional training of installation, use and maintenance.
- Regular engineer return visit service
- Free continuous optimization and upgrading service of product life cycle.
- Professional and rigorous 3Q(IQ/OQ/PQ) verification documentation and verification services in both English and Chinese, to help you meet compliance requirements of GLP, GMP and cGMP.

Ordering Information

	Item No	Product description
Host	EU-20	Intelligent integration ultrapure water system,20L/h, Standard, Ultrapure water, high pure water
	EU-40	Intelligent integration ultrapure water system,40L/h, Standard, Ultrapure water, high pure water
	EU-60	Intelligent integration ultrapure water system,60L/h, Standard, Ultrapure water, high pure water
	EU-20UV	Intelligent integration ultrapure water system,20L/h, Low TOC, Ultrapure water, high pure water
	EU-40UV	Intelligent integration ultrapure water system,40L/h, Low TOC, Ultrapure water, high pure water
	EU-60UV	Intelligent integration ultrapure water system,60L/h, Low TOC, Ultrapure water, high pure water
	EU-20UF	Intelligent integration ultrapure water system,20L/h, Eliminating endotoxin, Ultrapure water, high pure water
	EU-40UF	Intelligent integration ultrapure water system,40L/h, Eliminating endotoxin, Ultrapure water, high pure water
	EU-60UF	Intelligent integration ultrapure water system,60L/h, Eliminating endotoxin, Ultrapure water, high pure water
	EU-20UVF	Intelligent integration ultrapure water system,20L/h, Synthesizing, Ultrapure water, high pure water
	EU-40UVF	Intelligent integration ultrapure water system,40L/h, Synthesizing, Ultrapure water, high pure water
	EU-60UVF	Intelligent integration ultrapure water system,60L/h, Synthesizing, Ultrapure water, high pure water
	ED-20	Intelligent integration pure water system,20L/h, Standard, High pure water, RO^{1st} water
	ED-40	Intelligent integration pure water system,40L/h, Standard, High pure water, RO^{1st} water
	ED-60	Intelligent integration pure water system,60L/h, Standard, High pure water, RO^{1st} water
	ED-20UT	Intelligent integration pure water system,20L/h, Eliminating bacteria and particle, High pure water, RO^{1st} water
	ED-40UT	Intelligent integration pure water system,40L/h, Eliminating bacteria and particle, High pure water, RO^{1st} water
	ED-60UT	Intelligent integration pure water system,60L/h, Eliminating bacteria and particle, High pure water, RO^{1st} water
	EUS-13	Intelligent integration ultrapure water system,13L/h, Standard, Ultrapure water, high pure water
	EUS-25	Intelligent integration ultrapure water system,25L/h, Standard, Ultrapure water, high pure water
	EUS-13UV	Intelligent integration ultrapure water system,13L/h, Low TOC, Ultrapure water, high pure water
	EUS-25UV	Intelligent integration ultrapure water system,25L/h, Low TOC, Ultrapure water, high pure water
	EUS-13UF	Intelligent integration ultrapure water system,13L/h, Eliminating endotoxin, Ultrapure water, high pure water
	EUS-25UF	Intelligent integration ultrapure water system,25L/h, Eliminating endotoxin, Ultrapure water, high pure water
	EUS-13UVF	Intelligent integration ultrapure water system,13L/h, Synthesizing, Ultrapure water, high pure water
	EUS-25UVF	Intelligent integration ultrapure water system,25L/h, Synthesizing, Ultrapure water, high pure water
	EDS-13	Intelligent integration pure water system,13L/h, Standard, High pure water, RO^{2nd} water
	EDS-25	Intelligent integration pure water system,25L/h, Standard, High pure water, RO^{2nd} water
	EDS-13UT	Intelligent integration pure water system,13L/h, Eliminating bacteria and particle, High pure water, RO^{2nd} water
	EDS-25UT	Intelligent integration pure water system,25L/h, Eliminating bacteria and particle, High pure water, RO^{2nd} water
	EUE-10	Intelligent integration ultrapure water system,10L/h, Standard, Ultrapure water, EDI water
	EUE-20	Intelligent integration ultrapure water system,20L/h, Standard, Ultrapure water, EDI water
	EUE-10UV	Intelligent integration ultrapure water system,10L/h, Low TOC, Ultrapure water, EDI water
	EUE-20UV	Intelligent integration ultrapure water system,20L/h, Low TOC, Ultrapure water, EDI water
	EUE-10UF	Intelligent integration ultrapure water system,10L/h, Eliminating endotoxin, Ultrapure water, EDI water
	EUE-20UF	Intelligent integration ultrapure water system,20L/h, Eliminating endotoxin, Ultrapure water, EDI water
	EUE-10UVF	Intelligent integration ultrapure water system,10L/h, Synthesizing, Ultrapure water, EDI water
	EUE-20UVF	Intelligent integration ultrapure water system,20L/h, Synthesizing, Ultrapure water, EDI water
	EDE-10	Intelligent integration pure water system,10L/h, Standard, EDI water, RO^{1st} water
	EDE-20	Intelligent integration pure water system,20L/h, Standard, EDI water, RO^{1st} water
	EDE-10UT	Intelligent integration pure water system,10L/h, Eliminating bacteria and particle, EDI water, RO^{1st} water
	EDE-20UT	Intelligent integration pure water system,10L/h, Eliminating bacteria and particle, EDI water, RO^{1st} water
	ERS-13	Intelligent integration double RO water system,13L/h, Standard, RO^{2nd} water, RO^{1st} water
	ERS-25	Intelligent integration double RO water system,25L/h, Standard, RO^{2nd} water, RO^{1st} water
	ERS-13UT	Intelligent integration double RO water system,13L/h, Eliminating bacteria and particle, RO^{2nd} water, RO^{1st} water
	ERS-25UT	Intelligent integration double RO water system,25L/h, Eliminating bacteria and particle, RO^{2nd} water, RO^{1st} water

Ordering Information

	Item No	Product description	Item No	Product description
Cartridge	HPC101	Pretreatment cartridge A	HPC601	UP cartridge, standard
	HPC102	Pretreatment cartridge B	HPC602	UP cartridge, Low TOC
	HPC302	RO^{1st} module S2	HPC700	Air filter for tank
	HPC304	RO^{1st} module S4	HPC703	185&254nm double wavelength UV lamp
	HPC306	RO^{1st} module S6	HPC702	254nm UVlamp
	HPC303	RO^{1st} module F3	HPC719	UF ultrafiltration module
	HPC305	RO^{1st} module F5	HPC801	254nm UV lamp
	HPC403	RO^{1st} module D3	HPC802	TFterminal microfilter
	HPC405	RO^{2nd} module D5	HPC810	UF terminal ultrafilter
	HPC501	DI cartridge		
Accessory	Item No	Product description	Item No	Product description
	TANK1018	1.8-liter pressure water tank	DISP2001	HiDis dispenser arm (independent), equipped with 2M connection kit
	TANK1015	15-liter pressure water tank	PWA7200	Automatic water softener (salt required)
	TANK1040	40-liter pressure water tank	PWA7010	Pretreatment filter for source water
	TANK1075	75-liter pressure water tank	PWA7011	PP cartridge for pretreatment filter (5 μm,10 inch)
	TANK1100	100-liter pressure water tank	PWA7012	RS cartridge for pretreatment filter (10 inch)
	TANK1061	60-liter PE pure water tank, equipped with air filter and independent level control module with LCD display	PWA7501	Foot switch
	TANK1060	60-liter PE pure water tank, equipped with air filter	PWA7502	External leak sensor
	TANK1121	120-liter PE pure water tank, equipped with air filter and independent level control module with LCD display	PWA1301	Wall-mounted mounting bracket for XLE
	TANK1120	120-liter PE pure water tank, equipped with air filter		
Service	Item No	Product description		
	HPS51001	1-year extended warranty service (except for consumables)		
	HPS51003	3-year extended warranty service (except for consumables)		
	HPS52001	Verification documents in English		
	HPS53001	Basic verification service		
	HPS59001*	1-year, one-price all-inclusive maintenance agreement, including regular consumables replacement, maintenance and calibration		
	HPS59003*	3-year, one-price all-inclusive maintenance agreement, including regular consumables replacement, maintenance and calibration		

*On the basis of mutual confirmation of pure water consumption and feed water quality.

Web YouTube Instagram

For more product details, please login: www.hpurex.com

Tel: 0086-21-3107 5991

All content in this document (including but not limited to product pictures, Hyperpurex® company LOGO etc.) is owned by Hyperpurex and shall not be used or reproduced without permission.
Hyperpurex shall not be liable for any errors in this document or for any indirect losses arising from the provision, display or use of this document.
The information, instructions and technical specifications in this document are subject to change without notice.

Hyperpurex Instrument Technology (Shanghai) Co., LTD Version: 202603

HyperPureX